



COMPARISON BETWEEN A SINGLE 5 INCH ROLLER IN A MINIMUM CAVITY AND DOUBLE 5 INCH ROLLERS STACKED IN A MINIMUM CAVITY

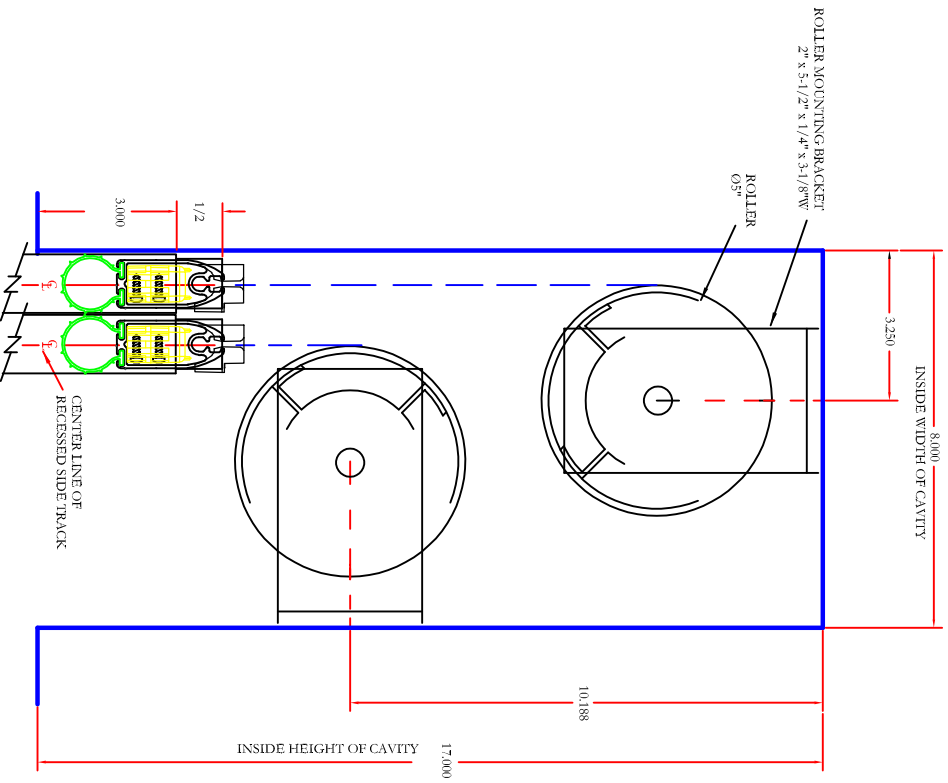

PLACEMENT OF 2 - 5" ROLLERS IN A CAVITY STACKED ONE ABOVE THE OTHER WITH RECESSED SIDE TRACK

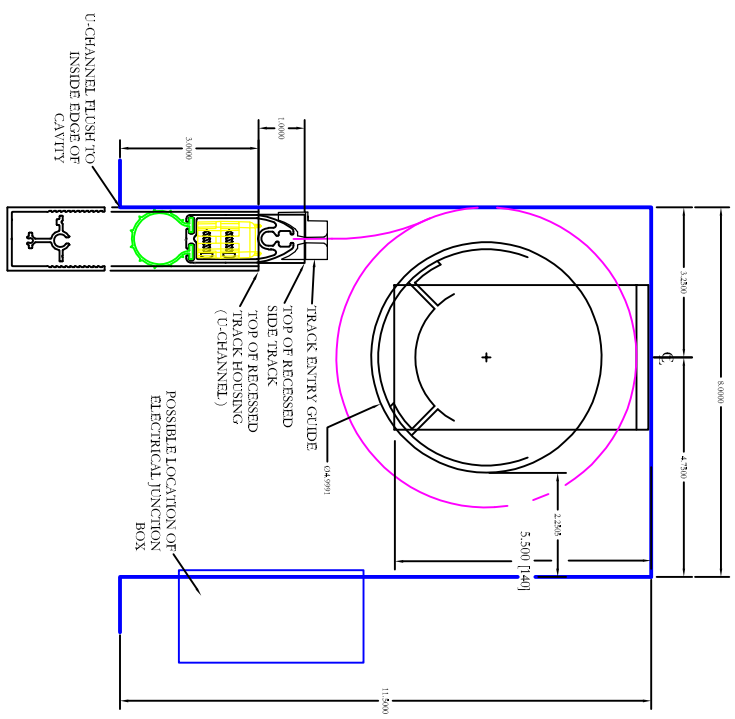

PLACEMENT OF 5" ROLLER, 5-1/2" ROLLER MOUNTING BRACKET AND RECESSED SIDE TRACK

- NOTES:
1. ALL THICKNESS OF CAVITY BASED ON THE UNIVERSAL SLIDE BAR AND A 4 INCH BOTTOM SEAL.
 2. ALL DIMENSIONS ARE GIVEN IN INCHES.
 3. INSIDE CAVITY DIMENSIONS ARE THE SMALLEST THAT CAN BE USED TO ALLOW THE BOTTOM HEAD TO CLOSE UP INSIDE THE CAVITY SPACE. UNDER NO CIRCUMSTANCES ARE THE CAVITIES TO BE MADE SMALLER THAN SHOWN.

Rev #	Description of Revision	Approved By/Date
Rev 01	Addition of Track Entry Guide on Recessed Track and updated cavity dimensions	N.D.R. 02/18/16

Creator:	Date:	Approved By/Date:
N.D.R.	03/25/2014	

Drawing Title:	Scale:
PSEXECSTACKEDDUAL5INCHROLLERS01	1 : 1